




## EM-B7452AE35

### 5MP HD Analog IR Bullet Camera


- 5MP 20fps/4MP real-time image, high resolution, true color
- AHD / TVI / CVI / CVBS standard and lossless video output
- Up to 1500 TVL resolution
- CMOS progressive scan, perfectly capturing the moving object
- Support OSD menu
- High speed, long distance and real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night
- Support noise reduction function
- 30 ~ 50m IR night view distance
- IP67 ingress protection
- Support COC

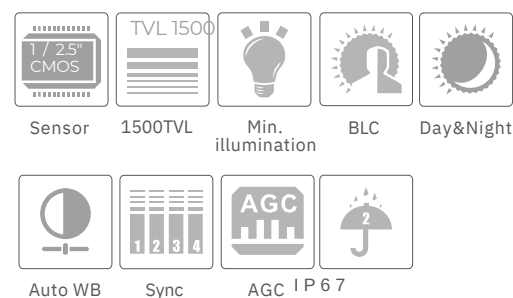

### SPECIFICATIONS

| Model Specifications | EM-B7452AE35   |
|----------------------|--|
| <b>Camera</b>        |  |
| Image Sensor         | 1 / 2.5" CMOS  |
| Resolution           | 5MP  |
| Image Size           | Max. 2944 × 1656 (16:9)  |
| Video Output         | AHD / TVI / CVI / CVBS   |
| Audio                | NO   |
| Image System         | PAL / NTSC   |
| Electronic Shutter   | Auto; 1/50s~1/100000s (PAL);<br>1/60s~1/100000(NTSC)   |
| IR Distance          | 30~50 m  |
| Frame Rate           | TVI: 2944×1656@20fps, 2560×1440@25fps/30fps<br>AHD: 2944×1656@20fps, 2560×1440@25fps/30fps<br>CVI: 2560×1440@25fps/30fps<br>CVBS: PAL/NTSC |
| Min. Illumination    | Color: 0.01lux@F1.2, AGC ON; B/W: 0 lux with IR  |
| Lens                 | 2.8 ~12mm  |
| Lens Mount           | M12  |
| S / N Ratio          | ≥52dB ( AGC OFF )  |
| Ingress Protection   | IP 67  |
| <b>Functions</b>     |  |
| Function Control     | OSD ( COC Control )  |
| Day & Night          | ICR  |
| Digital WDR          | Yes  |
| Digital NR           | Yes, 2D DNR  |
| AGC                  | Yes  |
| Auto White           | Yes  |
| Balance BLC          | Yes  |
| HLC                  | Yes  |
| Sharpness            | Yes  |
| Smart LED            | Yes  |
| Image Setting        | Yes  |
| Defect Correction    | Auto   |
| Language             | Chinese and English  |
| Angle Adjustment     | Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°  |
| <b>Others</b>        |  |
| Power Supply         | DC12V ( ± 15% )  |
| Power Consumption    | IR OFF : < 1W; IR ON : < 4W  |
| Working Environment  | - 30 °C ~ 50 °C, 10 % ~ 90 %(relative humidity)  |
| Dimensions ( mm )    | 217.7 × 80.5 × 80.3  |
| Weight ( net )       | Approx. 0.56KG   |

### DIMENSIONS

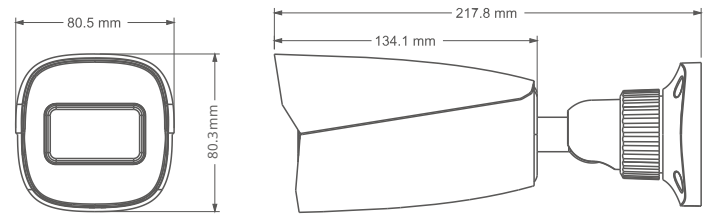

### AVAILABLE ACCESSORIES

