




EM-B7481AE1

8MP HD Analog IR Bullet Camera

- 8MP@15fps/5MP@20fps/4MP@30fps high resolution, true color
- AHD / TVI / CVI standard and lossless video output
- Up to 1700 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- High speed, long distance and real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night
- Support noise reduction function
- 20 ~ 30m IR night view distance
- IP67
- Support COC
- Support 960H CVBS output

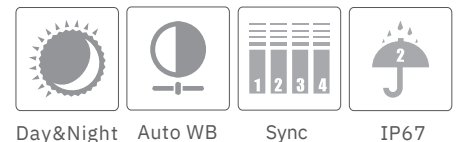

EYEMOTION by Electronic's Time srl

Indirizzo: via MadonnaPiccola 32 Q-R , 74015 Martina Franca
 Provincia: Taranto, ITALIA

Per ulteriori informazioni, visitare il nostro sito web: www.eyemotion.it

Centralino: +39-080-4802711

Web site: <http://www.eyemotion.it>

E-mail: info@eyemotion.it


EM-B7481AE1

8MP HD Analog IR Bullet Camera

SPECIFICATIONS

Model Specifications	EM-B7481AE1
Camera	
Image Sensor	1 / 2.5" CMOS
Resolution	5MP
Image Size	Max. 2944 × 1656 (16:9)
Video Output	AHD / TVI / CVI / CVBS
Audio	1CH built-in MIC
Image System	PAL / NTSC
Electronic Shutter	Auto; 1/50s~1/100000s (PAL); 1/60s~1/100000 (NTSC)
LED Range	20 ~ 30 m
Frame Rate	TVI: 2944×1656@20fps, 2560×1440@25fps/30fps AHD: 2944×1656@20fps, 2560×1440@25fps/30fps CVI: 2560×1440@25fps/30fps CVBS: PAL/NTSC
Min. Illumination	0 lux (LED ON)
Lens	3.6 mm
Lens Mount	M12 ≥52dB (AGC)
S / N Ratio	OFF
Ingress Protection	IP 67
Functions	
Function Control	OSD (COC Control)
ICR	Day & Night
Digital WDR	No
Digital NR	Yes, 3D DNR
AGC	No
Auto White Balance	Yes
BLC	Yes
HLC	Yes
Sharpness	Yes
Smart LED	Yes
Image Setting	Yes
Defect Correction	Auto
Language Angle	Chinese and English
Adjustment	Pan: 0°~360°; Tilt: 0°~80°; Rotation: 0°~360°
Others	
Power Supply	DC12V (± 15%)
Power Consumption	LED OFF : < 1W; LED ON : < 4W
Working Environment	- 30 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)
Dimensions (mm)	162.1x 74.8 x 73.8
Weight (net)	Approx. 0.25KG

DIMENSIONS

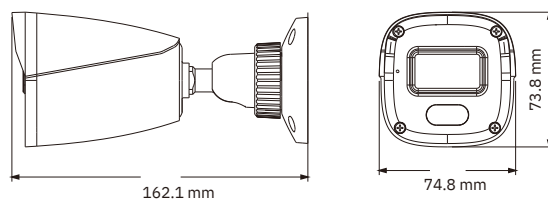

AVAILABLE ACCESSORIES

