




# EM-B7482AE1

## 8MP HD Analog IR Bullet Camera

- 8MP@15fps/5MP@20fps/4MP@30fps high resolution, true color
- AHD / TVI / CVI standard and lossless video output
- Up to 1700 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- High speed, long distance and real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night
- Support noise reduction function
- 30 ~ 50m IR night view distance
- IP 67
- Support COC
- Support 960H CVBS output

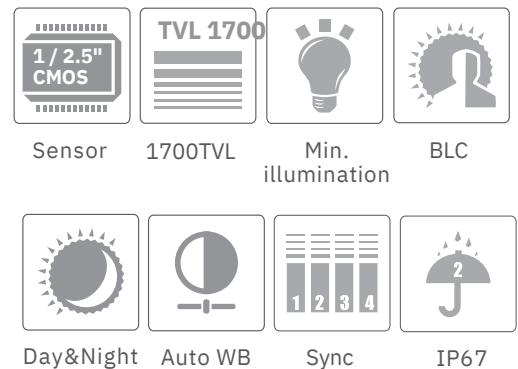

**EYEMOTION** by Electronic's Time srl

Indirizzo: via MadonnaPiccola 32 Q-R , 74015 Martina Franca  
 Provincia: Taranto, ITALIA

Per ulteriori informazioni, visitare il nostro sito web: [www.eyemotion.it](http://www.eyemotion.it)

Centralino: +39-080-4802711


Web site: <http://www.eyemotion.it>

E-mail: [info@eyemotion.it](mailto:info@eyemotion.it)

### SPECIFICATIONS

Model Specifications	<b>EM-B7482AE1</b>
<b>Camera</b>	
Image Sensor	1 / 2.5" CMOS
Resolution	8MP
Image Size	3840x2160
Video Output	AHD / TVI / CVI / CVBS
Audio	
Image System	PAL / NTSC
Electronic Shutter	Auto
IR Distance	30 ~50 m
Frame Rate	15fps
Min. Illumination	Color: 0.01lux@F1.2, AGC ON; B/W: 0 lux with IR
Lens	3.6 mm ( 2.8 mm optional ) 2.8-12mm, motorized zoom lens
Lens Mount	MM12 or D14 optional
S / N Ratio	≥52dB ( AGC OFF )
Ingress Protection	IP 67
<b>Functions</b>	
Function Control	OSD ( COC Control )
Day & Night	ICR
Digital WDR	No
Digital NR	Yes
AGC	No
Auto White Balance	Yes
BLC	Yes
HLC	Yes
Sharpness	Yes
Smart LED	Yes
Image Setting	Yes
Defect Correction	Auto
Language Angle	11 languages
Adjustment	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°
<b>Others</b>	
Power Supply Power	DC12V ( ± 10% )
Consumption	IR OFF : < 2W; IR ON : < 5.5W
Working Environment	- 30 °C ~ 50 °C, 10 % ~ 90 %(relative humidity)
Dimensions ( mm )	217.7 x 80.5 x 80.3
Weight ( net )	Approx. 0.57KG

### DIMENSIONS

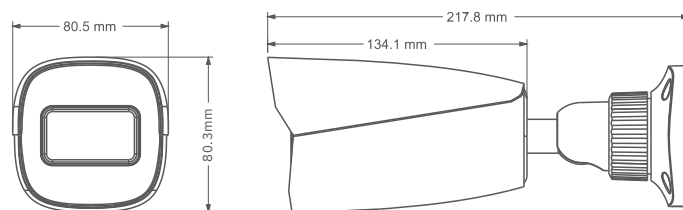

### AVAILABLE ACCESSORIES

