

# NDAА



# EM-C5373PE

- ▶ NDAА Compliance (I prodotti completamente conformi NDAА sono adatti per il governo, la difesa e una serie di progetti soggetti alla NDAА.)
- ▶ Smart IR II (Combinando il fascio abbagliante e anabbagliante per regolare l'intensità IR per adattarsi a diverse condizioni di illuminazione.)
- ▶ 140dB Super WDR (Prestazioni eccellenti anche quando il rapporto di luminosità dei più brillanti e scuri è fino a 140dB.)
- ▶ Funzioni avanzate (che vanta di supportare varie funzioni avanzate come HLC, ROI.)
- ▶ 1TB (Supporto ultra-large microSD/ SDHC/ SDXC scheda di archiviazione esterna fino a 1TB.)
- ▶ Staffa a 3 assi regolabile (fornisce una robusta piattaforma di montaggio per la regolazione dell'angolo su un piano a 3 assi.)
- ▶ Smart Stream (Larghezza di banda, archiviazione e bit rate vengono salvati con Smart Stream On, ad esempio, H.265+ consente di risparmiare 70% ~ 80% larghezza di banda che of H.264.)


## IP67 + IK10

## AI Mini Dome



### AI Video Analytics

La serie di telecamere AI può filtrare in modo intelligente gli oggetti per concentrarsi sul rilevamento umano e del veicolo in più eventi come l'ingresso della regione, l'uscita dalla regione, il vagabondaggio, il rilevamento avanzato del movimento,

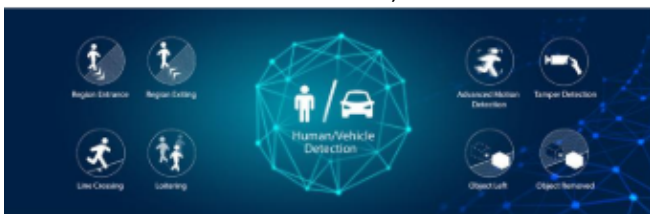

### 0.005Lux Ultra Low-light

La fotocamera starlight è in grado di fornire immagini a colori ad alto dettaglio anche in ambienti con scarsa illuminazione che raggiungono 0,005Lux(Color) o 0Lux(B/W) e ambienti con luce vicino infrarossa senza illuminazione supplementare.



### 30fps@4K

Fornendo risoluzione 4K HD con frame rate di 30fps, la fotocamera si comporta bene nel catturare immagini dettagliate indipendentemente dalla velocità di movimento.



### IP67 & IK10


Supportando la resistenza agli agenti atmosferici con grado di protezione IP67 e la resistenza agli atti vandalici con grado di protezione IK10, che rappresentano il livello leader del settore, la fotocamera è ben protetta dagli impatti avversi per garantire alte prestazioni.




	Model	EM-C5373PE (5MP)
<b>Camera</b>	Image Sensor	1/2.8" Progressive Scan CMOS
	Min. Illumination	Color: 0.008Lux@F1.6 B/W: 0Lux with IR on
	WDR	120dB Super WDR
	Lens	2.8mm/ 4mm/ 6mm @F1.6
	Mount	M12
	Field of View	H105°/D131°/V78°(2.8mm), H86°/D108°/V63°(4mm), H52°/D63°/V40°(6mm)
	Shutter Time	1/100000s~1s
	IR Distance	Up to 30m
	Day/Night Mode	Day/Night/Auto/Customize/Schedule
	S/N	>55dB
<b>Video</b>	Max. Image Resolution	2592 x 1944
	Primary Stream	60Hz: 30fps@(2592x1944, 2048x1536, 1920x1080, 1280x960, 1280x720, 704x576) 50Hz: 25fps@(2592x1944, 2048x1536, 1920x1080, 1280x960, 1280x720, 704x576)
	Secondary Stream	60Hz: 30fps@(704x576, 640x480, 640x360, 352x288) 50Hz: 25fps@(704x576, 640x480, 640x360, 352x288)
	Tertiary Stream	60Hz: 30fps@(1280x720, 704x576, 640x480, 640x360, 352x288) 50Hz: 25fps@(1280x720, 704x576, 640x480, 640x360, 352x288)
	Video Compression	H.265+/H.265(HEVC)/H.264+/H.264/MJPEG
	Video Bit Rate	16Kbps~16Mbps(CBR/VBR Adjustable)
	Privacy Masking	Up to 4 Areas
	ROI	Up to 8 areas
Image Setting	Brightness/Contrast/Saturation/Sharpness	
<b>Interface</b>	Ethernet	1*RJ45 10M/100M Ethernet Port
	Audio I/O	1Built-in Microphone; 1/1(Multi-interface Version)
	Alarm I/O	1/1 (Multi-interface Version)

<b>Network</b>	Network Storage	NAS(Support NFS, SMB/CIFS), ANR
	Protocol	IPv4/IPv6, ARP, TCP, UDP, RTCP, RTP, RTSP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, UPnP, Bonjour, SIP, SNMP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL, TLS 1.2 Bonjour, SIP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL, TLS 1.2
<b>Audio</b>	Audio Compression	G.711/AAC/G.722/G.726
	Audio Sampling Rate	8/16/32/48KHz
	Audio Bit Rate	16~256kbps
	Two-way Audio	Support
<b>Intelligent Analytics</b>	Video Analysis	Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Object Left, Object Removed
<b>System</b>	Storage	Support microSD/SDHC/SDXC Card Local Storage, up to 1TB
	Advanced Function	BLC, HLC, 2D DNR, 3D DNR, Defog, AWB, IP Address Filtering, AGC, Anti-flicker, Corridor Mode, Deblur
	SIP/VoIP Support	Yes, Voice & Video-over-IP
	Event Trigger	Motion Detection, Network Disconnection, etc. ; Motion Detection, Network Disconnection, External Input, Audio Alarm, etc. (Multi-interface Version)
	Event Action	FTP Upload, SMTP Upload, SD Card Record, SIP Phone, HTTP Notification, etc. ; FTP Upload, SMTP Upload, SD Card Record, External Output, SIP Phone, HTTP Notification, etc. (Multi-interface Version)
	System Compatibility	ONVIF Profile G & M & S & T, API
<b>General</b>	Working Temperature	-40°C~60°C
	Working Humidity	0 90%(Non-condensing)
	Power Supply	PoE (802.3af); PoE (802.3af) / DC 12V±10% (Multi-interface Version)
	Power Consumption	4WMAX 6W MAX(With IRon)
	Weather Proof	Up to IP67-rated for Weather-resistant Performance
	Housing	Vandal-proof IK10-rated Metal Housing
	Weight	500g
	Dimensions	118.5mm X 110.8mm X 65mm
	Warranty	



### Structure Diagrams

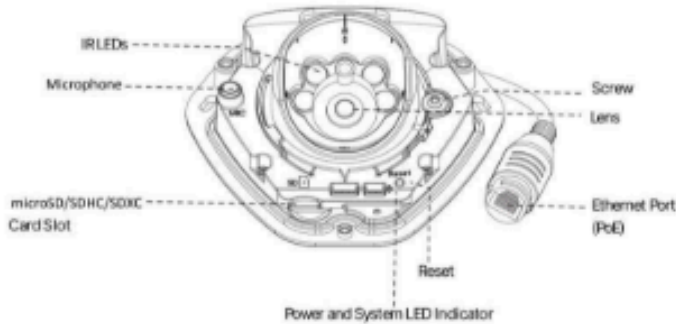

(Default Version)

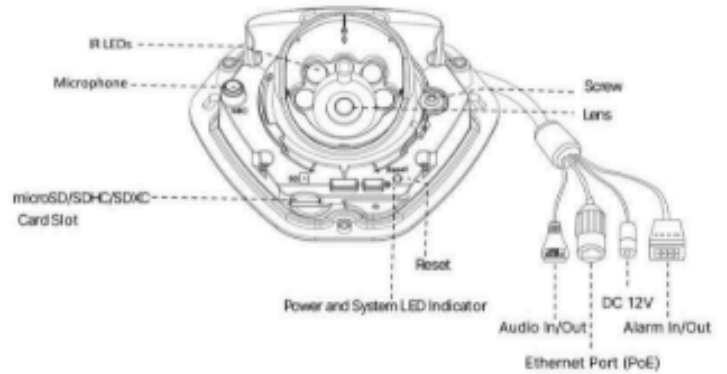

(Multi-interface Version)

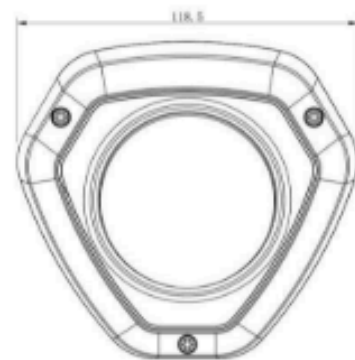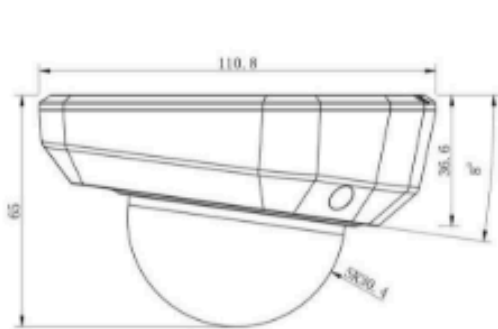

Units: mm

### Accessories Support

A01 Pole Mount

Weight: 720g  
Dimensions: 170\*51.5\*152.6mm



A03 External Corner Bracket

Weight: 900g  
Dimensions: 170\*152.5\*76.3mm



A71 Wall Mount

Weight: 530g  
Dimensions: 162\*124\*78 mm



A73 Adapter Plate

Weight: 28g  
Dimension: 115\*122.5\*10mm



A74 Junction Box

Weight: 60g  
Dimensions: 121.5\*116.5\*37.2

