



EM-DVR2732NCHC

32 CH Hybrid DVR

DECODERS



EM-DVR2732NCHC supports 1080P analog and IP video input simultaneously. It adopts the standard H.265 high profile compression format and the advanced SOC technique to ensure real time recording in each channel and realize outstanding robustness of the system.

EM-DVR2732NCHC supports 32 CH analog video input, 16 CH audio input and simultaneous 16 CH playback. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.

EYEMOTION by Electronic's Time

Indirizzo: via MadonnaPiccola 32 Q-R , 74015 Martina Franca
 Provincia: Taranto, ITALIA - P.iva 01893060739

Centralino: +39-080-4802711



Web site: <http://www.eyemotion.it>

E-mail: info@eyemotion.it

Features


- 32 CH TVI / AHD/CVI 5MP/ 4MP/ 3MP / 1080P / 720P / WD1 video input
- 32 CH DVRs support 8 CH 5MP / 4MP / 3MP / 1080P / 960P / 720P IP video input
- 16CH analog video input can be switched to 16CH IP video input
- Adopt standard H.265 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphics User Interface (GUI), window style operation by mouse
- Multi-type recording: manual / timed / sensor / motion /AI recording
- Playback : 16 CH simultaneously playback
- Search: time slice, time, event, tag and smart search
- Express and flexible backup via USB, network and so on
- Pentaplex: preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- Multi-user online simultaneously
- Authorization management, log review and device status review
- 1080P output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Andriod OS

Dimensions

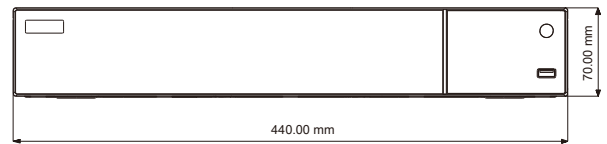

Rear Panel

EM-DVR2732NCHC

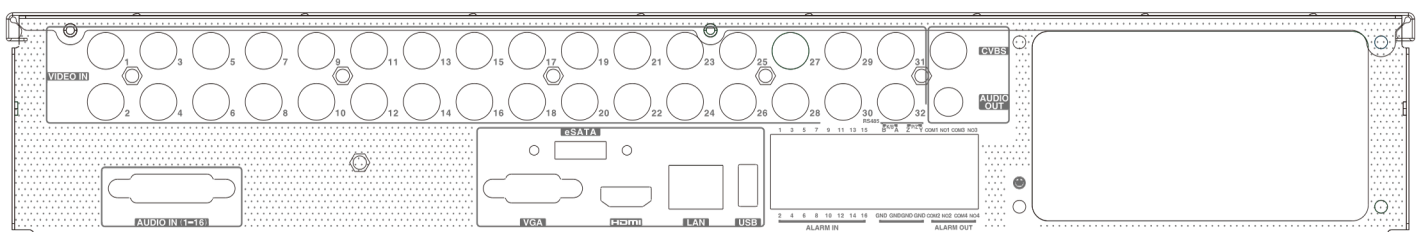

Specifications

Model	EM-DVR2732NCHC	
System	OS	Embedded Linux
Video	Analog Video Input	BNC × 3 2
		BNC interface (1.0Vp-p; 75 Ω)
		TVI/AHD/CVI : 5MP@20fps; 4MP/3MP/1080P/720P/WD1@25fps/30fps (live)
	IP Video Input	8CH (up to 24CH) Up to 5MP@30fps
		40CH
	Total Input	HDMI × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768 BNC × 1 : CVBS (used as the main or spot output)
	Output	H.264/H.265/H.265+
	Compression	1/4/6/8/9/13/16/25/32/36
Multi-screen Display	RCA × 16 RCA × 1 (linear, 600Ω) Take up channel one audio input	
Audio	Input	
	Output	
	Two-way audio	
	Compression	G.711(U/A)
Record	Resolution	5MP Lite/4MP Lite / 1080P/1080P Lite/720P/WD1/D1
	Frame Rate	Analog Channel: 5MP Lite@10fps (PAL / NTSC); 4MP Lite/1080P@12fps(PAL) / 15fps (NTSC); 1080P Lite/720P/WD1/D1@25fps (PAL) / 30fps (NTSC) IP Channel: 25fps (PAL) / 30fps (NTSC)
	Bit Rate	32Kbps ~ 5Mbps
Playback	Playback	16CH
	Search	Time slice / time / event / tag / smart search
	Smart Search	Highlight colors to display the camera record in a certain period of time, different colors refer to different record events
	Function	Play, pause, FF, FB, digital zoom, etc.
Alarm	Mode	Manual, motion, exception, smart event
	Input	16CH
	Output	4CH
AI Function	Smart Motion Detection Performance	16CH
	Perimeter Protection Performance	1CH
Network	Interface	RJ 45 1000Mbps × 1
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, HTTP, HTTPS, NTP, SMTP, etc.
	Incoming Bandwidth	40Mbps (max. 88Mbps)
	Outgoing Bandwidth	160Mbps
	Client Connection	Max. 15users access
MobileDevice	OS	iOS, Andriod
Storage	HDD	SATA×4, up to 10TB per HDD; E-SATA×1
Backup	Local Backup	U disk, USB mobile HDD
	Network Backup	Yes
Port	RS 485	Yes (full-duplex), connect to PTZ or keyboard
	USB	USB 2.0 × 1; USB 3.0 × 1
	Remote Controller	Optional
		ATX-250W
Others	Power Supply	
	Consumption	≤ 30W (without HDD)
	Dimensions(mm)	440 × 390 × 70 (W × D × H)
	Working Environment	-10~50°C, 10%~90% (humidity)
	Certificate	CE, FCC
Environmental Protection	Comply with Directive EU RoHS, WEEE, REACH	