




EM-D9565ES4C

6MP Dual Illumination Water-proof Turret Network Camera

- H.265+ /H.265 /H.264+ /H.264/MJPEG coding
- Max. resolution: 6MP (3200 × 1800)
- Auto day/night switch
- 3D DNR, HWDR, HLC, BLC, etc.
- ROI coding
- Support smart supplement light
- 30~40m white light view distance; 30~50m IR view distance
- DC12V/PoE power supply
- IP 67 ingress protection
- Support three streams
- Support remote monitoring by smart phones& tablet PCs with iOS and Android OS
- Support P2P function
- Support SMD
- Support line crossing detection, region intrusion detection, abandoned/missing object detection, video exception detection

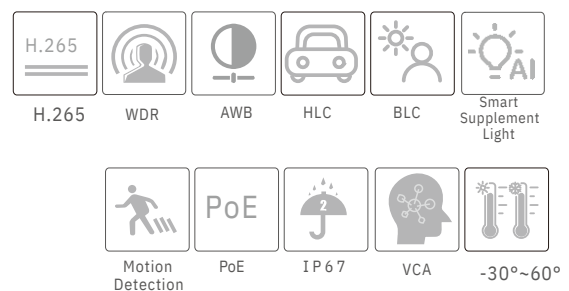

EYEMOTION by Electronic's Time srl

Indirizzo: via MadonnaPiccola 32 Q-R , 74015 Martina Franca
 Provincia: Taranto, ITALIA

Per ulteriori informazioni, visitare il nostro sito web: www.eyemotion.it

Centralino: +39-080-4802711

Web site: <http://www.eyemotion.it>

E-mail: info@eyemotion.it

EM-D9565S4C


6MP Dual Illumination Water-proof Turret Network Camera

SPECIFICATIONS

Model	EM-D9565ES4C
Specifications	
Camera	
Image Sensor	1 / 2.5 "CMOS
Image Size	3200×1800
Electronic Shutter	1 / 4 s ~ 1 / 100000 s
Iris Type	Fixed Iris
Min. Illumination	0.008 lux @F1.6, AGC ON; 0 lux with illumination on
Lens	2.8~12mm@F1.6,
Field of View	Horizontal: 108°~36°; Vertical: 57°~20°; Diagonal: 129°~42°
Focus	Motorized
Lens Mount	Φ14
Day&Night	ICR
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Digital NR	Yes
S/N Ratio	≥50dB
Angle Adjustment	Pan: 0°~360°; Tilt:0°~80°;Rotation: 0°~360°
Image	
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub /Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.265 Compression Standard	Main Profile@Leve4.1 High Tier
Resolution	6MP (3200 × 1800), 4MP (2688 × 1520), 1080P (1920 × 1080), 720P (1280 × 720), D1, VGA (640 × 480), 480 × 240, CIF
Main Stream	60Hz: 6MP(1~20fps) /4MP/1080P (1~30fps) 50Hz: 6MP(1~20fps) /4MP/1080P (1~25fps)
Sub Stream	720P/D1/VGA/CIF (60Hz: 1~30fps; 50Hz: 1~25fps)
Third Stream	D1/480× 240/CIF (60Hz: 1~30fps; 50Hz: 1~25fps)
Bit Rate	64 Kbps ~8Mbps
Bit Rate Type	VBR / CBR
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser
Audio Compression	G711A/U
ROI	Each ROI to be configured separately
Interfaces	
Network	RJ45
Video Output	No
Audio	1CH audio input; 1CH built-in MIC(closed by default)
Storage	Built-in micro SD card slot, up to 256GB
Reset	Yes
Functions	
Remote Monitoring	Web browser /TVT NVR/NVMS2.X/Mobile APP
Web Browser	Chrome 89.0+/Edge 89.0+/Firefox 87.0+/Safari 14.0+
Online Connection	Support simultaneous monitoring for up to 6 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, RTMP, PPPoE, DDNS, SMTP, FTP, 802.1x, SNMP, UPnP, HTTP, HTTPS, HTTP POST, P2P, QoS
Interface	ONVIF
Protocol Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection, SMD, SD card error, SD card full, IP address conflict, network disconnection, video exception
Smart Event	Line crossing/region intrusion (human/vehicle classification), abandoned/missing object detection
General Function	Watermark, IP address filtering, video mask, heartbeat, ANR, cloud upgrade, smart supplement light, corridor pattern
PoE	Yes (IEEE802.3af)
Supplement Light Range	IR range: 30 ~ 50 m; white light range:30 ~ 40 m
Ingress Protection	IP67
Security	Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP

Lens	Detect	Observe	Recognize	Identify
2.8~12mm(W)	66m(218ft)	27m(87ft)	13m(44ft)	7m(23ft)
2.8~12mm(T)	204m(669ft)	82m(269ft)	41m(135ft)	20m(66ft)
Others				
Power Supply	DC12V/PoE			
Power Consumption	< 9.5W			
Storage Conditions	- 30 °C ~ 65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing)			
Operating Conditions	- 30 °C ~ 60 °C (-22°F~140°F), Humidity: less than 95 % (non-condensing)			
Dimensions (mm)	Φ 111.6 × 99.6			
Weight (net)	Approx. 0.66KG			
Installation	Ceiling mounting; wall mounting			
Certificate	CE, FCC			
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)			

DIMENSIONS

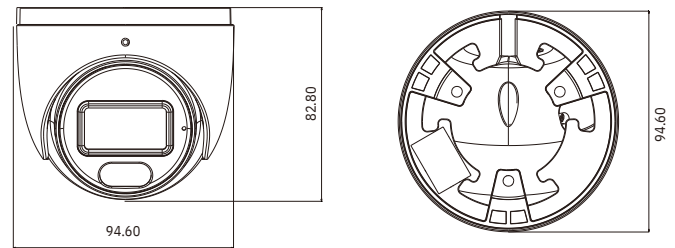

AVAILABLE ACCESSORIES

